

Slides Technical Specifications



Robust decorative solution

Slides is a Wood & Washi patented window decoration system with the appearance of wooden blinds.

With Slides, each slat within one system can be set manually in three positions: diagonally upwards, horizontally, and diagonally downwards. This allows the light and view to be adjusted as desired at any height.

Two options

Slides are available in two options: mounted loose and strung. Slides can be installed on most standard windows; it's more than adequate for tilt and turn windows and as a room divider.





Handling

With a subtle movement of the hand along the slats, the oblique position is achieved. By gently shaking the system back and forth, all slats will automatically return to a horizontal position.

Cords

Each Slides system contains 2 to 4 cords. Normally, outer cords are placed 5 or 15 cm from the edge, depending on the system's width. This can be adjusted in consultation.

Ladder straps and control cords are superfluous when operating Slides. This makes Slides very suitable for children.

Slats

Wood

Wood is a natural product that will never be completely straight. There may also be slight differences in color, shape, and dimensions under the influence of temperature and humidity. Slides are therefore not recommended for use in rooms with high humidity, like in bathrooms.

Colors

The rings and shoulders with which the slats are attached to the cords are supplied in the color of the slat as standard. The slats in color BW31 Taupe are fitted with transparent parts as standard. The different colors of the slats, rings, and shoulders can optionally be combined within one system.






Mounting and dimensions in the mounted loose version

Mounting

The system can be mounted loosely with supplied tensioners. Additional wall brackets allow for mounting the system upon a wall. The system is supplied with a top and a bottom aluminum profile available in different colors.

Sizes

Maximum and minimum system sizes available are shown in the price list.

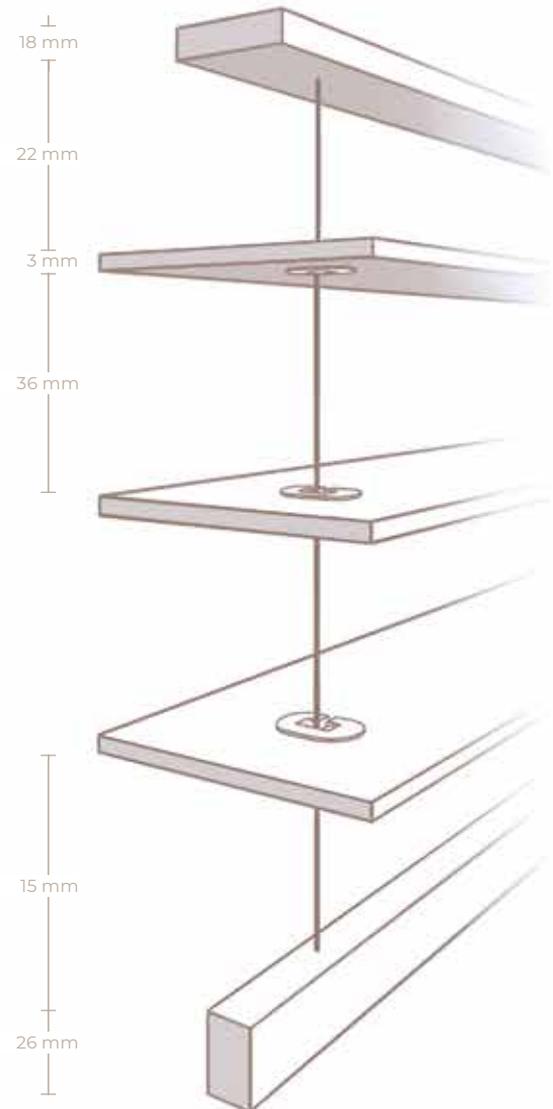

Mounting and dimensions in the strung version



Mounting

The system is mounted upon a window frame or a wall using the supplied wall supports. Wall supports can be long or short, aluminum or white. The system cords are stretched vertically between the supports.

Additional clamping brackets can be used to attach the system to tilt and turn windows or doors.

Sizes

Maximum and minimum system sizes available are shown in the price list.

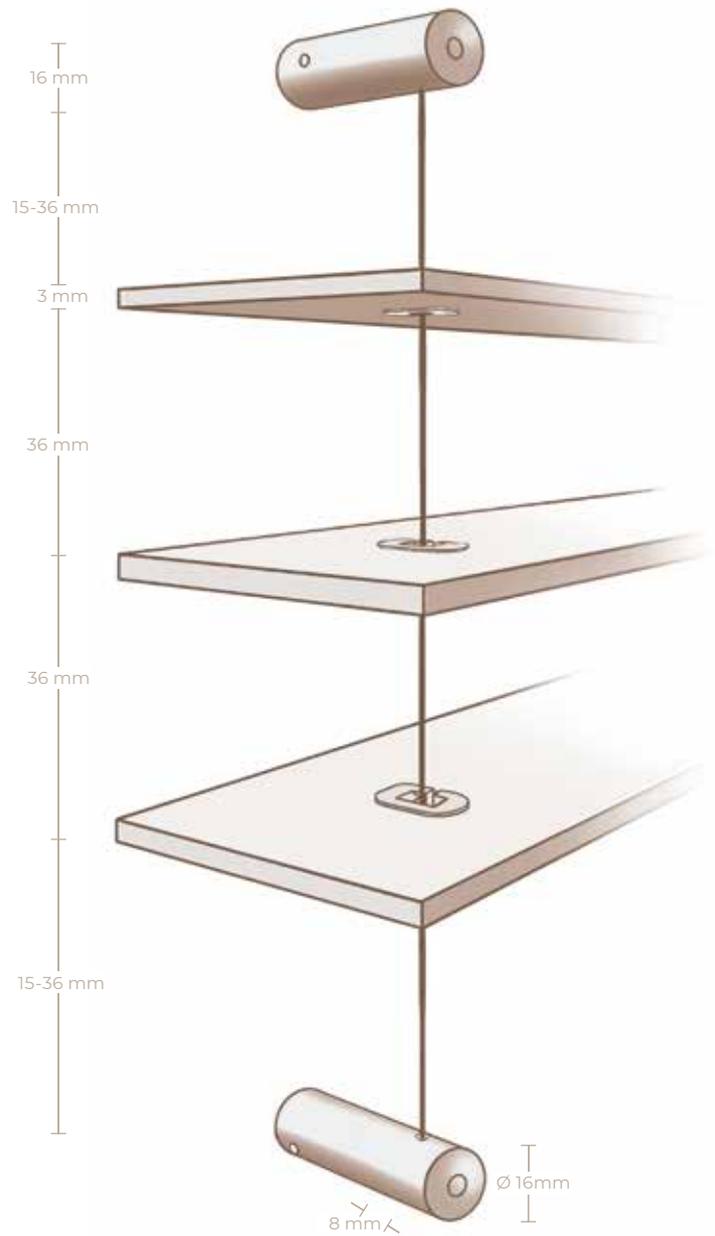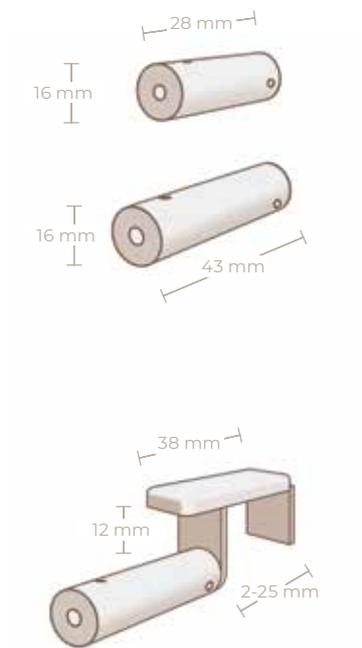

Mounting in a niche

The simplicity of Slides allows the wooden slats to be fitted into a window while maintaining their contour. This creates a built-in shutter effect.

System height and width

Measure the window niche height on the left and on the right. Measure the window niche width at the top and at the bottom. When ordering, state the smallest numbers of height and width and specify if it is a clear dimension or final product size.

Clear dimension and net sizes

To calculate the final product size, Wood & Washi subtracts 5 mm from the width for clear dimension. The spacing between slats is critical to the net height of a Slides system. In Slides systems, the space between slats is 36 mm.

Rounded height

By rounding, the net height of the delivered system can therefore be up to 36 mm less than the size ordered. Each Slides system comes standard with one extra slat that you can use to enlarge the height by 36 mm if required.



Mounting on a niche

Slides may also be used as a room divider or mounted upon a window.

System height and width

When mounting on a window, wooden slats are placed upon the window frame. In this case, the final product size is to be indicated (system height and width). Determine the required height and width of the system, and order the system indicating: final product size.

Clear dimension and net sizes

Indicated final product width is the same as delivered net sizes. In this case, Wood & Washi does not subtract any clearance.

The spacing between wooden slats is critical to the net height of a Slides system. In Slides systems, the space between slats is 36 mm.

Rounded height

By rounding, the net height of the delivered system can therefore be up to 36 mm less than the size ordered. Each Slides system comes standard with one extra slat that you can use to enlarge the height by 36 mm if required.

